


PUMP SPECIFICATIONS

Manufacturer: Pioneer Pump
Size: 4"x4", 150# Flanges
Type: Centrifugal
Casing: Ductile Iron ASTM A536 65-45-12
Impeller: 10"; CA6NM
Solids: 3" Spherical
Impeller Shaft: 17-4 PH Stainless Steel
Seal: Tungsten carbide vs. silicon carbide, mechanical
Wear Ring: ASTM A48 Class 40 Grey Iron
Bearings: Single row ball bearing
Hardware: 300 Series Stainless Steel hardware

ENGINE SPECIFICATIONS

Manufacturer: Isuzu Final Tier 4
Type: 4 Cylinder, Turbo Charged Diesel Engine
Cooling: Liquid Cooled
Performance: 48 HP @ 2000 RPM
Displacement: 2.2 liters or 134 in³
Starter: 12V Electric
Fuel Tank: 80 U.S. Gallons;
Full Load Operating Time: 30 hours

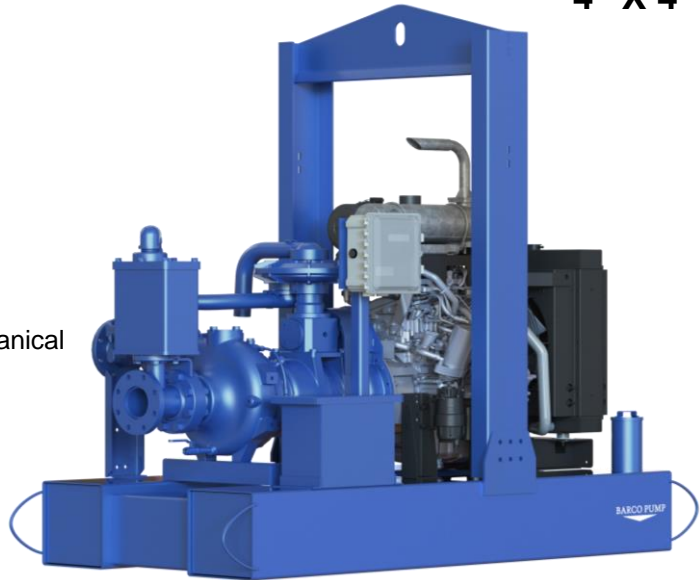

**Shown with options

FEATURES:

Standard Equipment: 4" Swing Check Valve, Lifting bale
 Battery, Exhaust Rain Cap, Lockable Fuel Cap, Automatic liquid level Control.
Optional Equipment: Butterfly Valves, Pressure Gauge, Suction Float Assembly,
 DOT bumper pull Trailer Kit, Multiple Fitting Options - Please Ask Your Representative

