BARCO PUMP

BPG121021C

12"x10"

PUMP SPECIFICATIONS

Manufacturer: Gorman Rupp
Size: 12x10" #150 flange
Type: Prime Assisted, Trash Handling
Casing: Ductile Iron 65-45-12
Impeller: Enclosed, 2 vane, Ductile Iron
Solids: 2" Spherical
Impeller Shaft: Alloy Steel 4150M
Seal: Oil Lubricated, Mechanical
Wear Ring: Ductile Iron 65-45-12
Bearings: Oil lubricated Roller
Hardware: Standard Plated Steel

*shown with options

ENGINE SPECIFICATIONS

Manufacturer: Cummins
Type: 6 Cylinder, Diesel Engine Final tier 4
Cooling: Liquid
Performance: 600 HP @ 2100 RPM
Displacement: 15 liters or 915.356 in³
Starter: 12V Electric
Fuel Tank: 330 U.S. Gallons; 15 U.S. Gallons DEF tank
Full Load Operating Time: 12 hours

FEATURES:
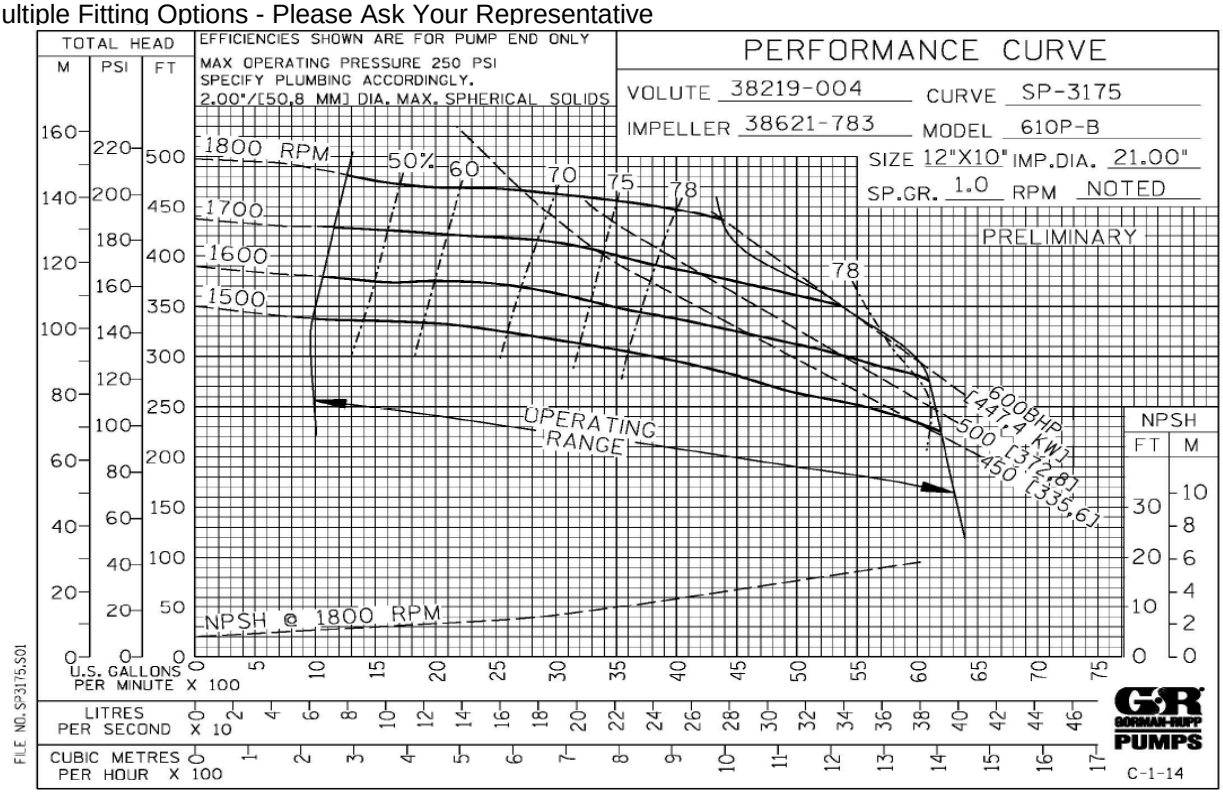
Standard Equipment: 8" Swing Check Valve, DOT Goose neck Trailer Kit
Battery, Exhaust Rain Cap, Lockable Fuel Cap, Automatic liquid level Control.
Optional Equipment: Butterfly Valves, Pressure Gauge, Suction Float Assembly
Multiple Fitting Options - Please Ask Your Representative